

RF Cable, SMA-F ~ SMA-M

ERF5002

Description

The ERF5002 is a RF-Cable suitable for RF applications. The cable has 1 SMA female connector, and 1 SMA male connector. It can be used for RF cable assemblies, and as an accessory for antenna's.



Typical applications

- RF Cable assembly
- Antenna accessory

Features

Mechanical Properties

Connector Type:

SMA Female & SMA Male

Cable Length:

200 mm \pm 3

Cable type:

RG174

Operating Temperature Range:

-20°C~+75°C

Storage Temperature Range:

-40°C~+80°C


Dimensions

*unit: mm

Part	Description	Material	Finish	QTY
1	SMA Female	Brass	Golden plating	1
2	RG-174 Cable	PVC	Black	1
3	SMA Male	Brass	Golden plating	1
4	Heat-Shrink tube	PVC	Black	1

RF Cable, SMA-F ~ SMA-M

ERF5002

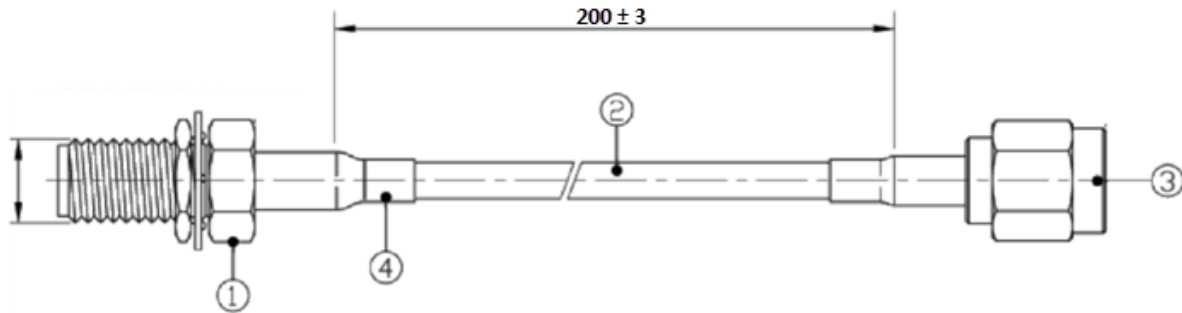

Connector



SMA Male



SMA Female



RP-SMA Male



RP-SMA Female

The ERF5002 uses a SMA Female and an SMA Male connector.

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	changes
V01.00	16-07-2023	First issue of document, EK